REV.	DESCRIPTION	DATE
A		08-2012
B		

RoHS Compliant





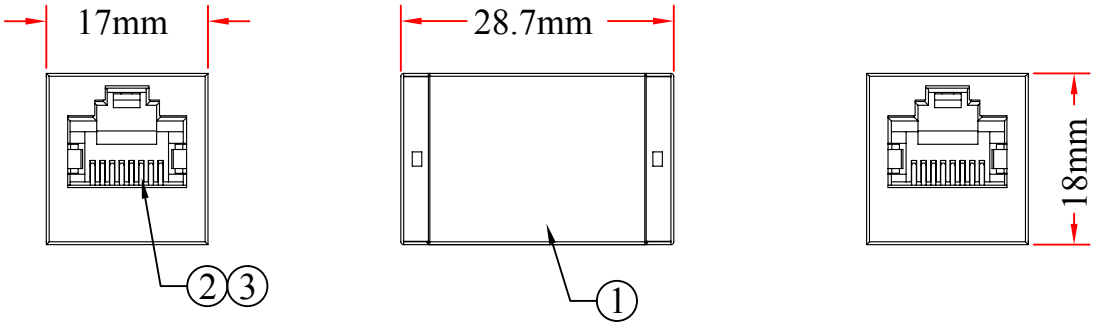

Performance:
Meets Cat.5e EIA/TIA 568B.1 Standard

Electrical Specification:
Insulation Resistance:500M ohms(min.)
Contact Resistance:20M ohms(max.)
Current Rating:1.5Amps
DC Resistance:0.1 ohm(max.)
Withstanding Voltage:1000 VAC RMS@60Hz/1min.

Mechanical Specification:
RJ45 Jack Insertion Cycle:Over 2000 Cycles(min.)
Operation Temperature:-40 to 70 degree

NO.	SPECIFICATIONS
3	RJ45 Jack, 8P8C 50 Micro Inches,Gold Plated
2	UL94V-0 Approval PCB
1	UL94V-0 Approval ABS Body,Silver Color

BOM LIST

ITEM NUMBER	301-C50S			DRAWER	JL
TITLE	CAT5E (RJ45) Female / Female Inline Shielded Coupler, Silver			CHECKED	
				APPROVED	
MATERIAL		SCALE			
REV.	A	UNIT	INCH		
DRAWING NO:					

888-212-8295 CableWholesale.com